

FIG. 1

FIG. 2 is a perspective view of the apparatus of FIG. 1, showing the two cylindrical components 12 and 14, the connecting pipe 16, and the rectangular component 18, all mounted on the base 22. The base 22 is shown with a grid pattern, indicating it is a flat surface. The components 12 and 14 are cylindrical and have a flange at the top. The pipe 16 connects the two cylinders. The rectangular component 18 is positioned between the two cylinders. The entire assembly is mounted on the base 22.

FIG. 2

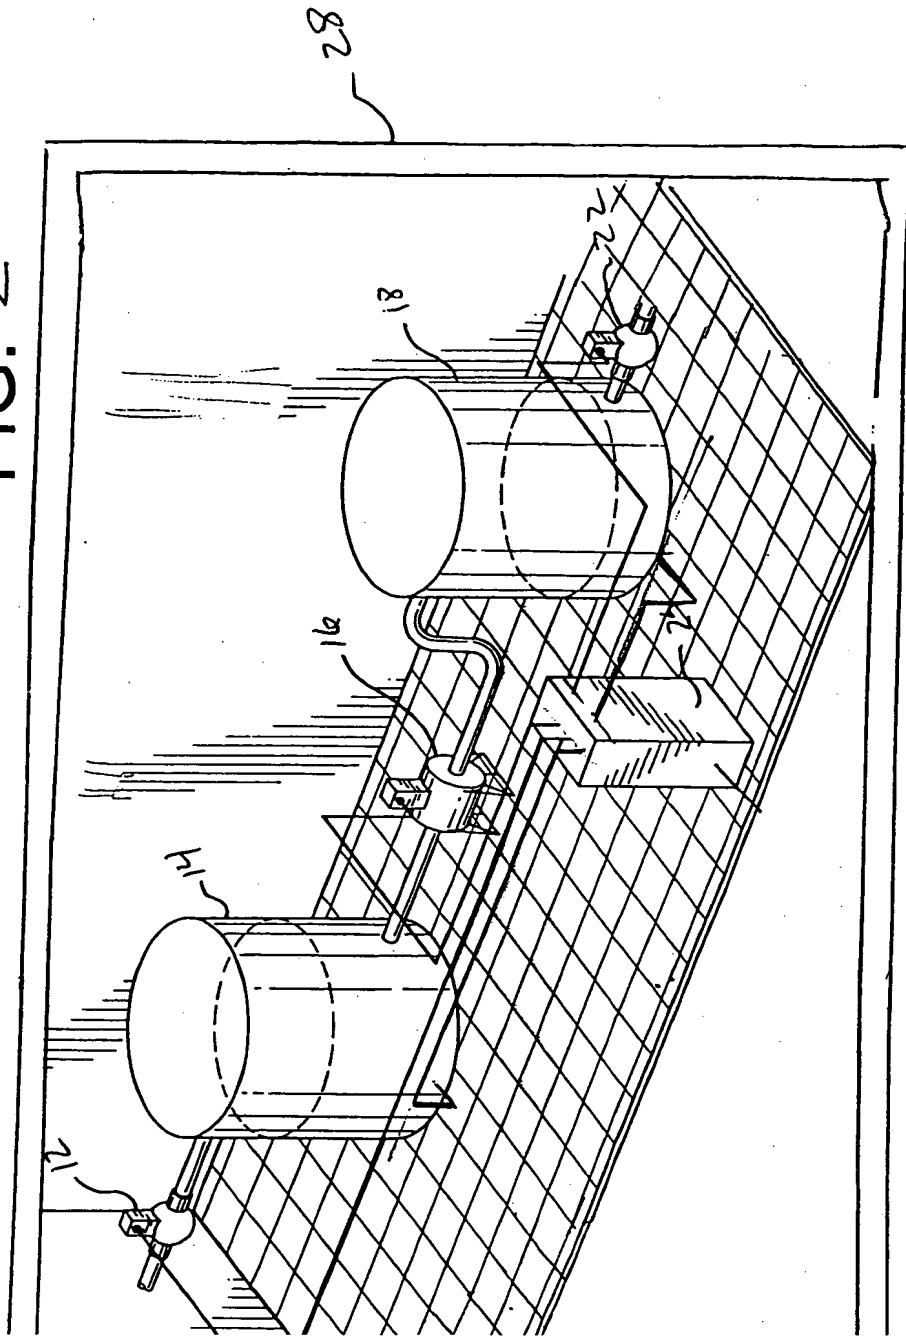


FIG. 3 is a perspective view of the device of FIG. 1, showing the device in a closed position. The device is shown in a perspective view, and the components are labeled with reference numerals. The device is shown in a perspective view, and the components are labeled with reference numerals.

FIG. 3

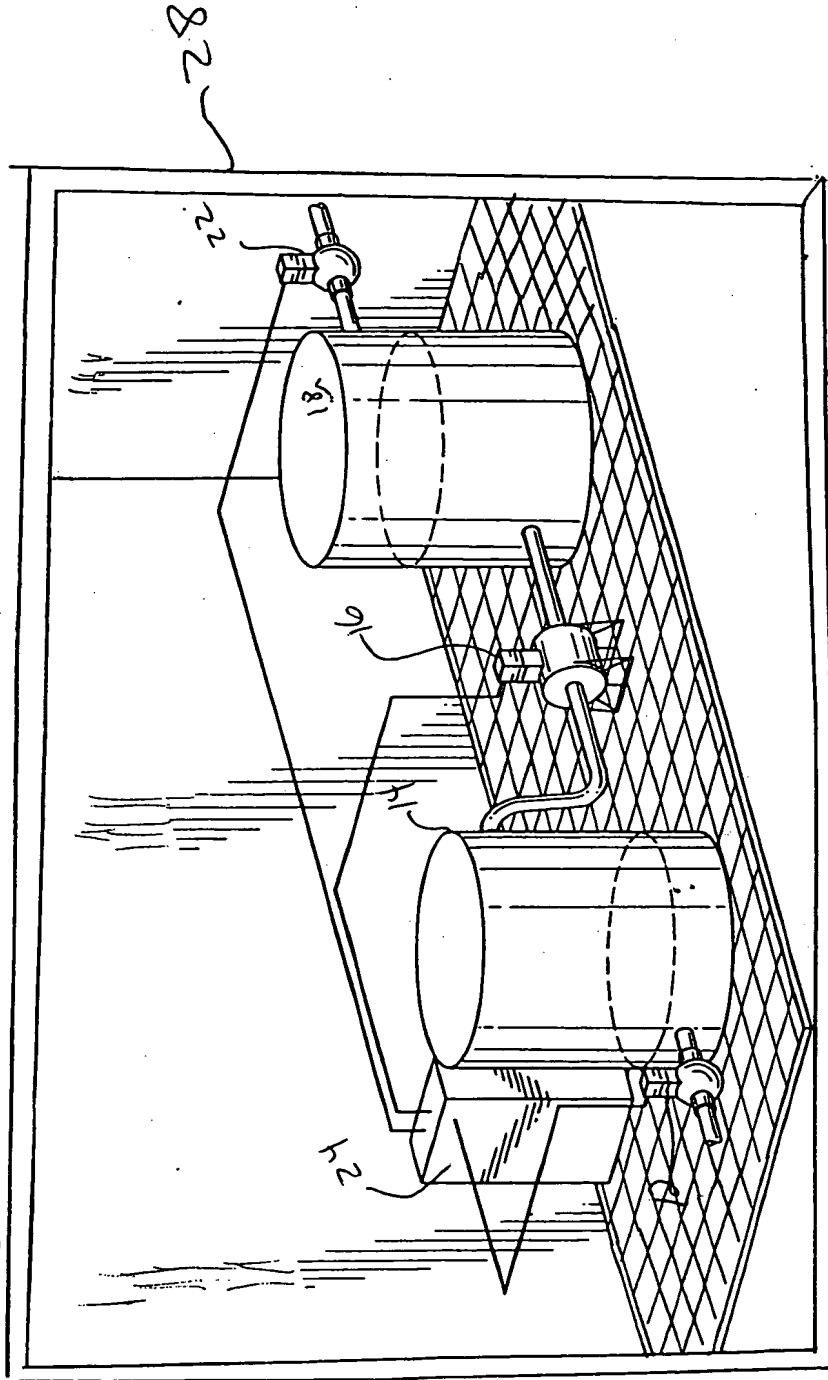


FIG. 4

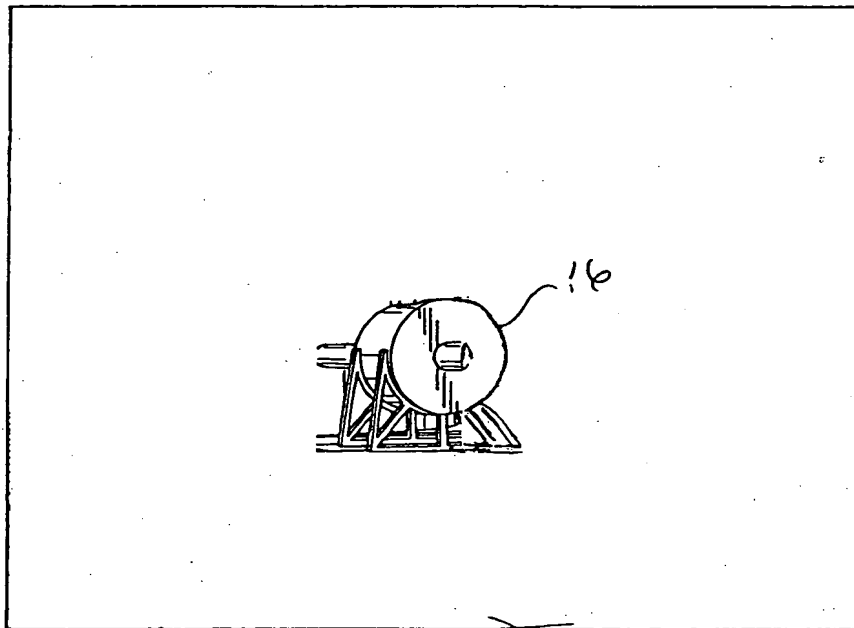


FIG. 5


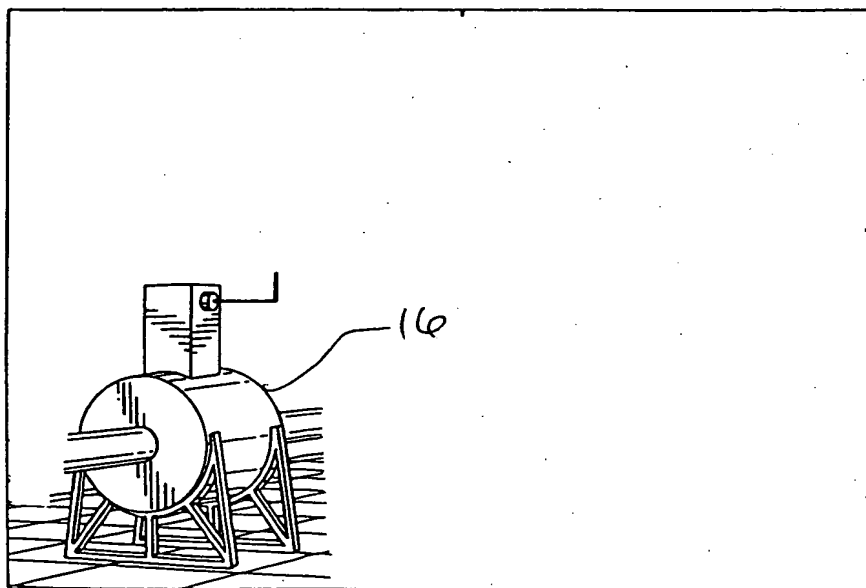


FIG 6

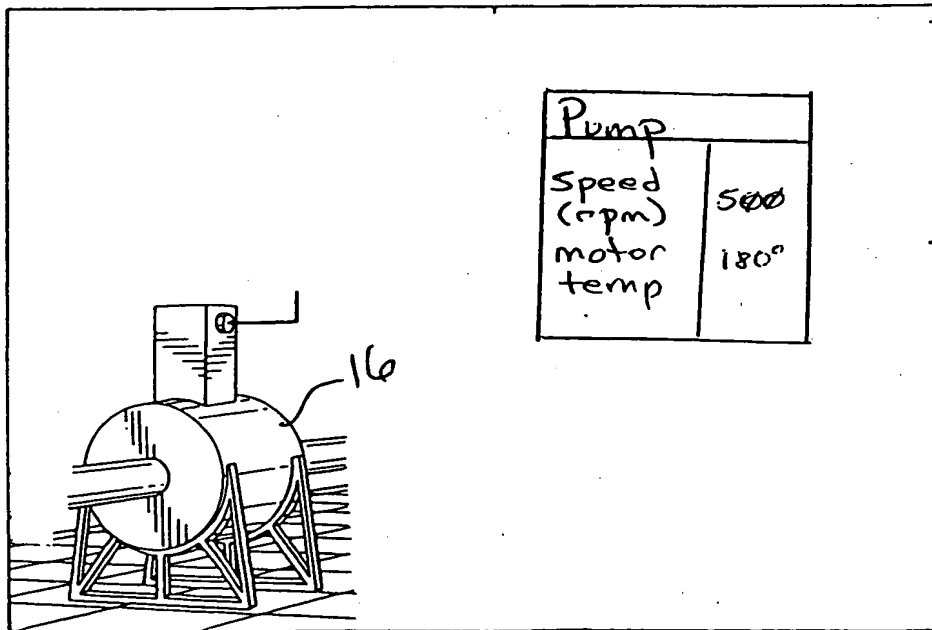

2.8